

# ONSA

## Nut Splitters



### - Angular Head

Range M6 - M48 | Max. Working Pressure 700 bar



#### Features / Application

- Designed to safely split seized / corroded nuts upto 44 HRC without damaging the bolt / stud by controlling the chisel movement
- Compact & ergonomic angled head design with spring return piston
- Worn out chisel can be re-sharpened or replaced
- Useful where hot work is prohibited

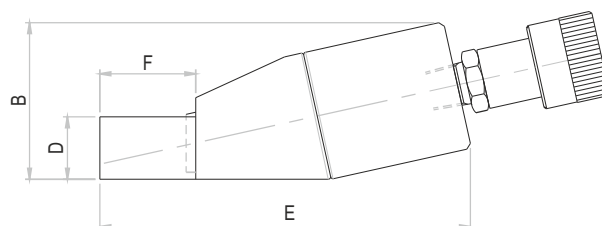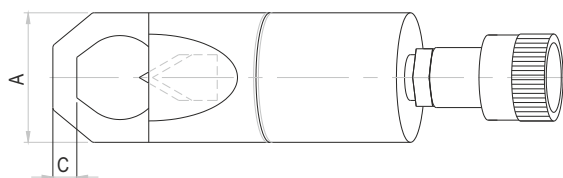

#### ONSA Series - O Orione N Nut S Splitter A Angular head 1018 Nut across flat

Model	Stud diameter		Nut A/F		A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Wt. (Approx) (kg)	Suitable hand pump
	(mm)	(inch)	(mm)	(inch)								
ONSA-1018	M6-M12	1/4" - 3/8"	10-18	1/2" - 11/16"	40	52	8	20	130	30	1	OHPA 3P4-2-1.4
ONSA-1824	M12-M16	3/8" - 9/16"	18-24	11/16" - 15/16"	54	67	12	24	163	41	2	OHPA 3P4-2-1.4
ONSA-2432	M16-M22	9/16" - 3/4"	24-32	15/16" - 1 1/4"	64	79	13	30	187	52	3	OHPA 3P4-2-1.4
ONSA-3241	M22-M27	3/4" - 1"	32-41	1 1/4" - 1 5/8"	78	94	20	37	219	69	4.5	OHPA 3P4-2-1.4
ONSA-4150	M27-M33	1" - 1 1/4"	41-50	1 5/8" - 2"	95	113	21	45	265	78	9.6	OHPA 3P4-2-1.4
ONSA-5060	M33-M39	1 1/4" - 1 1/2"	50-60	2" - 2 3/8"	106	128	25	54	297	91	13	OHPA 3P4-2-1.4
ONSA-6075	M39-M48	1 1/2" - 1 7/8"	60-75	2 3/8" - 2 15/16"	156	185	27	75	357	110	34	OHPA 3P4-2-1.4

• Higher capacity and customized solutions on request. • Specifications are subject to change due to continual improvement.